# ISUZU NGR

### **STANDARD CAB**

### GVWR/GCWR

17,950/23,950 lbs.

Tapered/Multi-Leaf

Vacuum/Hydraulic with 4-Channel ABS Disc/Drum

Aisin A465 6-speed auto. with double overdrive and lock-up  $2^{nd}$ -6<sup>th</sup> gears

intercooled diesel

5.2L (317 in.<sup>3</sup>) 215hp @ 2,500 rpm

452 lb.-ft. @ 1,850 rpm

Dash-mounted oil level check switch and light

2 Maintenance-Free 750-CCA

225/70R19.5F (12-pr) Standard

Integral Hydraulic Power

Tilt and Telescopic

33 Gal. side mount (176'' WB Only)

Dual fuel filter with dash mounted indicator light

30 Gal. in-rail

Isuzu 4HK1-TC turbocharged

8,440/14,550 lbs.

**GAWR** Front

Rear

6,830 lbs. 12,980 lbs.

6,830 lbs. 14,550 lbs.

5.125

7.20 in.<sup>3</sup> 316,800 lb.-ft./in.

Standard

Optional

140-amp

**REAR AXLE CAPACITY** *Ratio* 

FRONT AXLE CAPACITY

BODY/PAYLOAD ALLOWANCE

SUSPENSION F/R SPRINGS Capacity

**FRAME** Section Modulus Resistance Bending Moment

SERVICE BRAKES Front/Rear

EXHAUST BRAKE

TRANSMISSION

### ENGINE

Displacement Engine Power Engine Torque

Oil Level Indicator

### LIMITED SLIP DIFFERENTIAL

ALTERNATOR

BATTERIES

TIRES LRR (Low Rolling Resistance)

STEERING

STEERING COLUMN

FUEL TANK Standard Optional


### FUEL/WATER SEPARATOR














Wheelbase (in.)	Cab to	Cab to End	Back of	Overall	Body	Overall	Axle	Overall
	Axle (in.)	of Frame (in.)	Cab (in.)	Length (in.)	Length (in.)	Width (in.)	Width (in.)	Height (in.)
109.0	86.5	129.6	7.7	200.5	10-12	81.3	65.6	92.4
132.5	110.0	153.1	7.7	224.0	14	81.3	65.6	92.4
150.0	127.5	170.6	7.7	241.5	16-18	81.3	65.6	92.4
176.0	153.5	196.6	7.7	267.5	18-20	81.3	65.6	92.4
200.0	177.5	220.6	7.7	291.5	22	81.3	65.6	92.4

#### 2016 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	(Time of	Limitations r Mileage, Comes First)*	Percentage Of Dealer's Normal Charge Paid By Owner		
coronago	Time in years*	Vehicle miles*	Parts	Labor	
Basic	0-3 Years	Unlimited	No Charge	No Charge	
Engine	0-3 Years	Unlimited	No Charge	No Charge	
Transmission					
Drive Axle					
<ul> <li>Driveshaft</li> </ul>	0-3 Years	Unlimited	No Charge	No Charge	
<ul> <li>Front Axle I-Beam</li> </ul>			_		
<ul> <li>Crossmembers</li> </ul>					
<ul> <li>Flywheel Housing</li> </ul>					
Clutch Housing					
Frame Rails	0-3 Years	Unlimited	No Charge	No Charge	
	3-5 Years	Unlimited	50%	50%	
Engine Emissions Control	0-5 Years	0-100,000	No Charge	No Charge	
System - Federal					
Tires	0-2 Years	0-24,000	No Charge	No Charge	
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge	

\* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date

All photographs, illustrations, equipment and technical data in this brochure are based on the latest information available at the time of publication. Isuzu Commercial Truck of America, Inc. reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications and models, and to discontinue models or equipment. Isuzu vehicles are assembled from component parts manufactured by Isuzu Motors Limited, its affiliated companies, and by independent suppliers who manufacture such components to Isuzu's exacting standards for quality, performance and safety. Some vehicles are shown with optional equipment. Some equipment is dealer installed. Visit your authorized Isuzu dealer for warranty and other details.

### ISUZU

### **CREW CAB**

#### GVWR/GCWR

17,950/23,950 lbs.

GAWR Front Rear

FRONT AXLE CAPACITY

BODY/PAYLOAD ALLOWANCE

REAR AXLE CAPACITY Ratio

SUSPENSION F/R SPRINGS Capacity

FRAME Section Modulus Resistance Bending Moment

SERVICE BRAKES Front/Rear

EXHAUST BRAKE

TRANSMISSION

### ENGINE

Displacement Engine Power Engine Torque

Oil Level Indicator

### LIMITED SLIP DIFFERENTIAL

ALTERNATOR

BATTERIES

TIRES LRR (Low Rolling Resistance)

STEERING

STEERING COLUMN

FUEL TANK Standard

FUEL/WATER SEPARATOR



6,830 lbs. 12,980 lbs.

6,830 lbs.

14,550 lbs. 5.125

Tapered/Multi-Leaf 8,440/14,550 lbs.

11.89 in.<sup>3</sup> 523,160 lb.-ft./in.

Vacuum/Hydraulic with 4-Channel ABS Disc/Drum

Standard

Aisin A465 6-speed auto. with double overdrive and lock-up 2<sup>nd</sup>-6<sup>th</sup> gears

Isuzu 4HK1-TC turbocharged intercooled diesell

5.2L (317 in.<sup>3</sup>) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm

Dash-mounted oil level check switch and light

Optional

140-amp

2 Maintenance-Free 750-CCA

225/70R19.5F (12-pr) Standard

Integral Hydraulic Power

Tilt and Telescopic

30 Gal. in-rail

Dual fuel filter with dash mounted indicator light












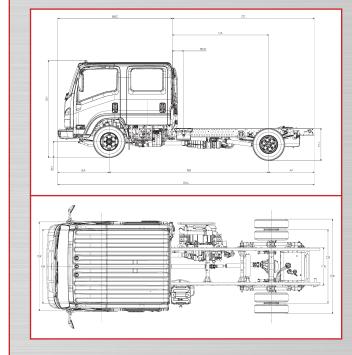

Wheelbase (in.) Cab to Cab to End Back of Overall Overall Axle Overall Body Axle (in.) of Frame (in.) Cab (in.) Length (in.) Length (in.) Width (in.) Width (in.) Height (in.) 150.0 131.6 241.5 81.3 88.5 5.3 12 65.6 92.4 114.5 157.6 5.3 267.5 81.3 65.6 92.4 176.0 16

## 2016 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	(Time of	Limitations r Mileage, Comes First)*	Percentage Of Dealer's Normal Charge Paid By Owner		
Coverage	Time in years*	Vehicle miles*	Parts	Labor	
Basic	0-3 Years	Unlimited	No Charge	No Charge	
Engine	0-3 Years	Unlimited	No Charge	No Charge	
Transmission     Drive Axle     Driveshaft     Front Axle I-Beam     Crossmembers     Flywheel Housing     Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge	
Frame Rails	0-3 Years	Unlimited	No Charge	No Charge	
	3-5 Years	Unlimited	50%	50%	
Engine Emissions Control System - Federal	0-5 Years	0-100,000	No Charge	No Charge	
Tires	0-2 Years	0-24,000	No Charge	No Charge	
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge	

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.